




C058380A2

110 Delta Drive
Pittsburgh, PA 15238
NAFTA Sales: (1)800-245-3984
HK Sales : (852)3102-9337
magnetics@spang.com
www.mag-inc.com

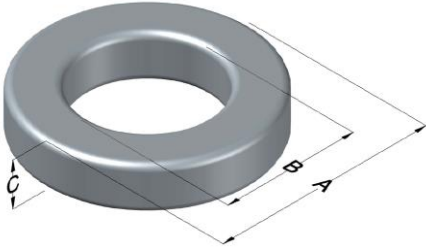

High Flux Permeability (μ)	A_L (nH/T ²)	Core Marking			Coating Color
		Lot Number	Part Number	Inductance Grade	
125	89 $\pm$ 8%	XXXXXX	58380A2	X	Khaki

Dimensions	Uncoated		Coated Limits			Packaging Bulk Pack 4 bags/box Box Qty= 2000 pcs
	(mm)	(in)	(mm)	(in)		
OD (A)	17.3	0.680	18.1	0.710	max	
ID (B)	9.65	0.380	9.01	0.355	min	
HT (C)	6.35	0.250	7.12	0.280	max	

Electrical Characteristics			Physical Characteristics						
Watt Loss @ 100 kHz, 100mT max (mW/cm ³)	DC Bias min (oersteds)		Voltage Breakdown wire to wire min (V _{AC})	Break Strength min (kg)	Window Area W _A (mm ²)	Cross Section A _e (mm ²)	Path Length L _e (mm)	Volume V _e (mm ³)	Weight (g)
1000	80%	50%	1000	28.0	63.8	23.2	41.4	960	7.7
	46.0	81.0							

Winding Information						Temperature Rating	
Winding Length Per Turn				Wound Coil Dimensions (mm)			Curie Temp: 500°C
Winding Factor	(mm)	Winding Factor	(mm)	40% Winding Factor	OD	19.6	Coating Temp (Continuous up to): 200°C
					HT	10.1	
				Completely Full Window	Max OD	24.9	Notes:
					Max HT	16.3	
0%	23.2	40%	28.0	Surface Area (mm²)			
20%	25.6	45%	28.6				
25%	26.2	50%	29.3	Unwound Core			
30%	26.6	60%	30.8				
35%	27.4	70%	32.4	40% Winding Factor	1,400		

Typical DC Bias Performance

