

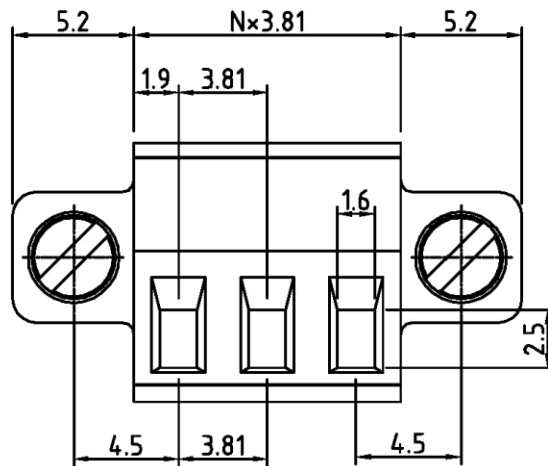


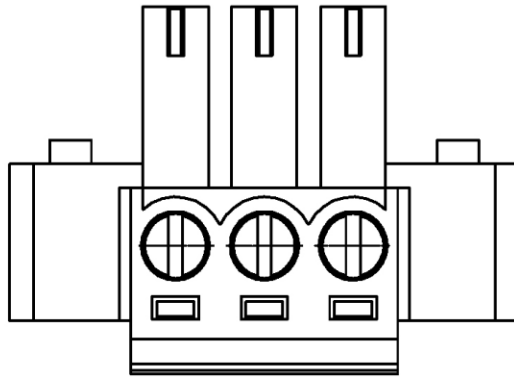

N=Number of contacts

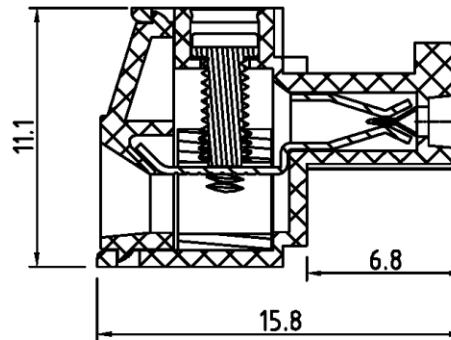

Technical Data:

Material:

- Contact(metal housing): Brass Machined
- Terminal screw: Steel Galvanized and chromitized or Nickel plated or Tin plated(standard)(option)M2
- Flange screw: Steel chromitized M2.5
- Wire guard: PhBz,tin plated.
- Insulator body(housing): Polyamide(Glass filled)(UL94V-0)

Electrical

- Voltage rating: 125VAC
- Current rating: 8 Amps/way max
- Contact resistance: 20mΩ(max)
- Insulation resistance: 5000MΩ/1000V
- Withstanding Voltage: 1500VAC(1min) Test time=60sec/1pcs
- Wire range: 16-26AWG

Mechanical:

- Torque: 2kgf.cm/M2
- Operating temperature: -33°C to +120°C

Safety approval data:



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

TBH038-SWCF-xx-LF

SERIES

LEADFREE
02~24WAY
FLANGE
CAGE
SCREW 90°
FEMALE

DESCRIPTION: