



R13-57

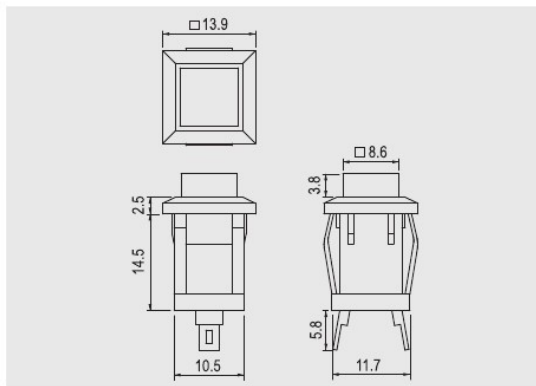


Rating
1A 125V AC
0.5A 250V AC
Contact resistance
50mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
AC 1000V 1 minute
Cut-out



FEATURES

- * MATERIAL: Frame and Actuator is nylon (UL flame: 94V-2). Terminals are silver plated brass.
- * Snap in mounting, easy to install switch into panel.

R13-57  -  

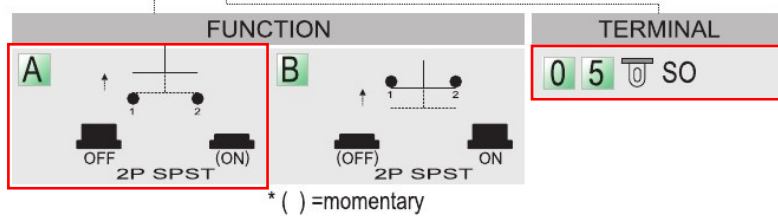

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Shin Chin:](#)

[R13-57A-05-BG](#)