




HD-516RE-XXP

PITCH: 3.50 mm, Rating: 8A,
300V

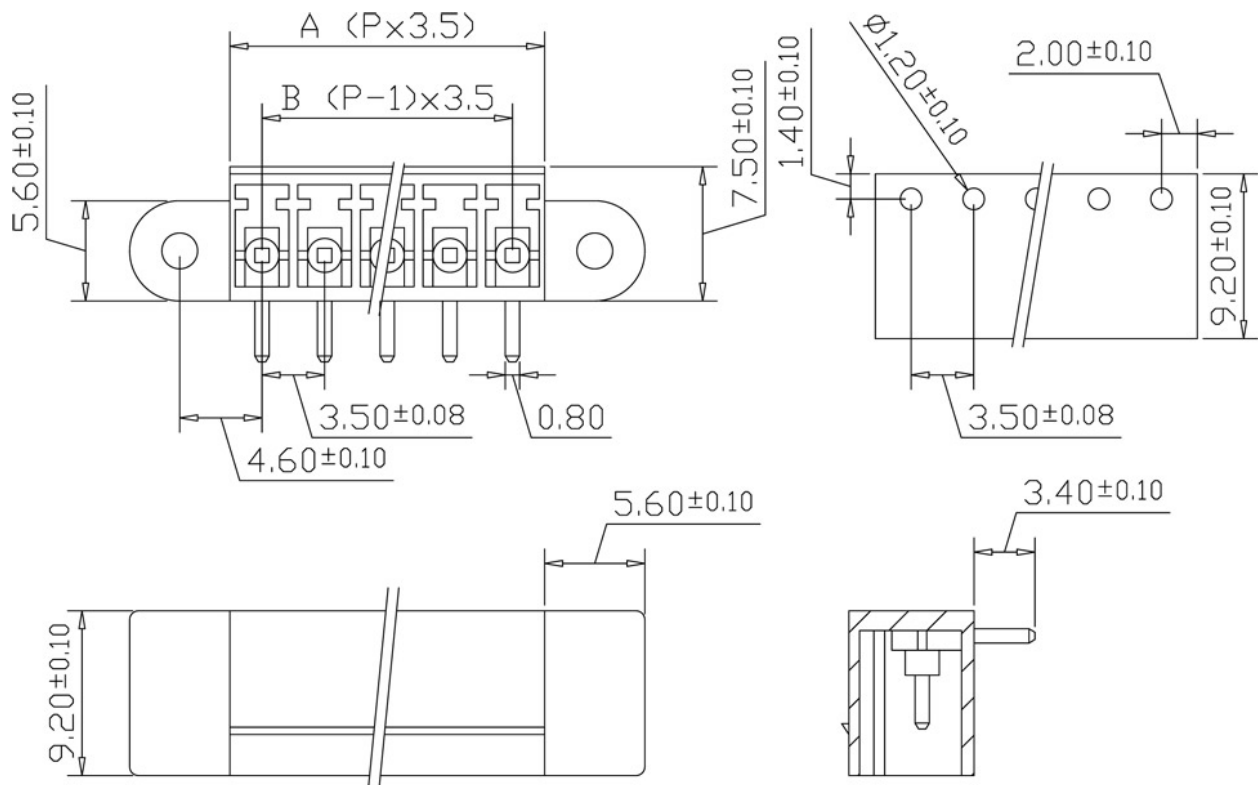

**General Information**

Pitch (mm)	3.5
Poles	02~24P
Color	Green
Insulation material	PA66
Conductor material	Copper Alloy
Plating of conductor surface	Tin Plated

Technical Data

Rated current (A)	8
Rated voltage (V)	300
Wire Range (AWG)	---
Screw thread	---
Tightening torque (Lb-in)	---
Flame retardant rating, compliant with UL94	V0
Operating temperature	-40°C to +105°C

UL Recognized

Rated current (A)	8(FW1)
Rated voltage(V)	300
Wire Range(AWG)	---

CSA Recognized

Rated current (A)	---
Rated voltage(V)	---
Wire Range(AWG)	---